




# NEWPORT


## DECORATIVE SHROUD



- EPA: 3 •
- Shroud Weight: 27 lbs •
- Shroud Material: Urethane •
- Pole Material: Fiberglass •
- Non-conductive, Non-corrosive •

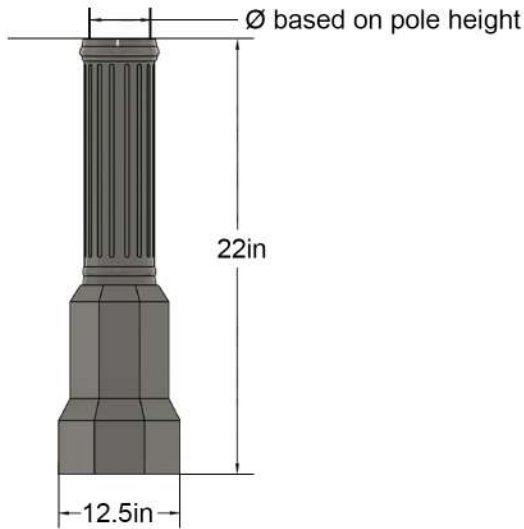

1 PIECE



### PATTERN OPTIONS




FLUTED




SMOOTH

### DIRECT BURIAL OPTION

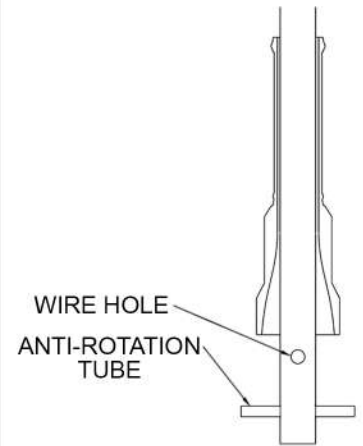


DO NOT SCALE

**PLEASE NOTE:**  
The handhole on the pole is 2.5 x 5in and will be located 18in above ground level. (handhole will be hidden under shroud)

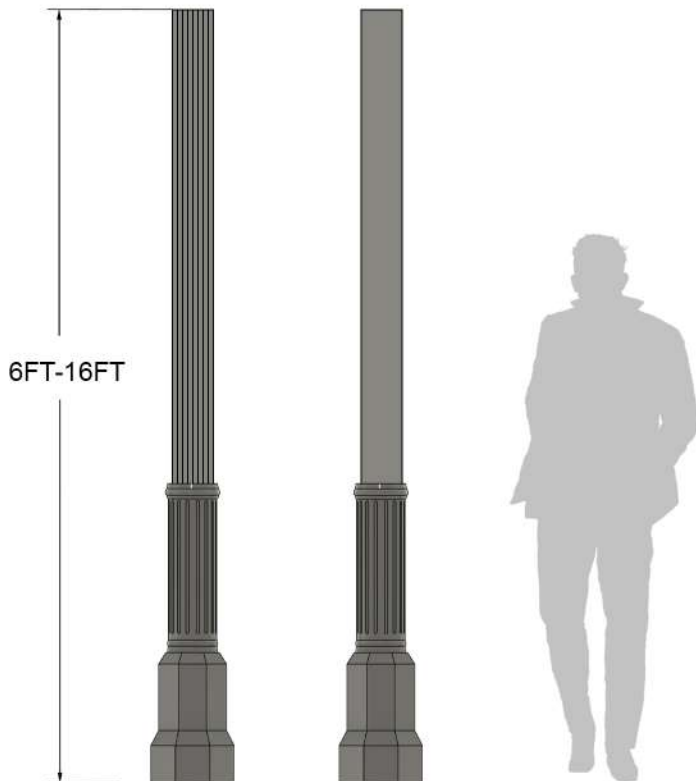

### ANCHOR BASE OPTION

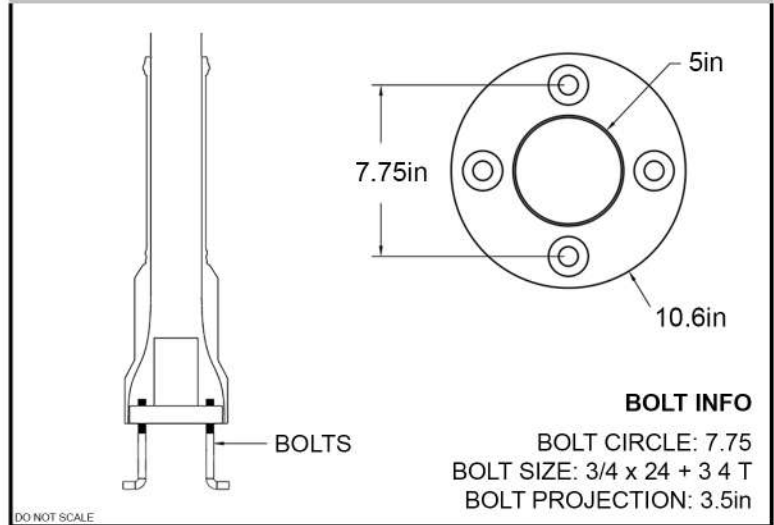

DO NOT SCALE

### BOLT INFO

BOLT CIRCLE: 7.75  
BOLT SIZE: 3/4 x 24 + 3 4 T  
BOLT PROJECTION: 3.5in

## ORDERING EXAMPLE

| SHROUD | 1PC/2PC       | INSTALLATION TYPE                     | PATTERN                    | POLE HEIGHT                                                                                                      | FINISH                                                                                          | COLOR                                                                       | TENON                                                                                | HANDHOLE                   | GFI                                                                                               | F. HOLDER                      |
|--------|---------------|---------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------|--------------------------------|
| NEW    | 1PC - 1 piece | AB - anchor base<br>DB - direct brury | SM - smooth<br>FL - fluted | 6FT - 6ft pole<br>8FT - 8ft pole<br>10FT - 10ft pole<br>12FT - 12ft pole<br>14FT - 14ft pole<br>16FT - 16ft pole | HG - smooth high gloss<br>CI - textured satin (cast iron appearance)<br>SSG - smooth semi gloss | BLK - black<br>BR - bronze<br>GR - gray<br>CM - color match (RAL# required) | T1 - 3in x 3in<br>T2 - 2 3/8in x 3in<br>T4 - 2 3/8in x 4 5/8in<br>T5 - 3in x 4 5/8in | A - 2 1/2in x 5in handhole | GFI - standard Ground Fault Circuit Interrupter<br>GFIU - in use Ground Fault Circuit Interrupter | FLH - side mounted flag holder |

see accessory sheet for more info  
(leave blank if you do not want these options)

NEW + 1PC + DB + SM + 12FT + HG + BR + T1 + A + - + -

= NEW-1PC-DB-SM-12FT-HG-BR-T1-A

# NEWPORT

## FIBERGLASS POLE INFORMATION



### ANCHOR BASE POLES

| MODEL #    | SHAFT LENGTH (FT) | TIP OUTER Ø (IN) | GROUND LEVEL Ø (IN) | BOLT SIZE (IN)  | ANCHOR BASE BOLT CIRC. (IN) | NOMINAL POLE WEIGHT (LBS) | MAX ALLOWABLE WEIGHT (LBS) | 3 EPA MAX (MPH) |
|------------|-------------------|------------------|---------------------|-----------------|-----------------------------|---------------------------|----------------------------|-----------------|
| AB-SM-6FT  | 6                 | 4.5              | 5.2                 | 3/4 x 24 + 3 4T | 7.75                        | 20                        | 25                         | 100             |
| AB-SM-8FT  | 8                 | 4.5              | 5.2                 | 3/4 x 24 + 3 4T | 7.75                        | 25                        | 25                         | 100             |
| AB-SM-10FT | 10                | 4.5              | 5.3                 | 3/4 x 24 + 3 4T | 7.75                        | 29                        | 25                         | 100             |
| AB-SM-12FT | 12                | 4.5              | 5.5                 | 3/4 x 24 + 3 4T | 7.75                        | 32                        | 30                         | 100             |
| AB-SM-14FT | 14                | 4.5              | 5.6                 | 3/4 x 24 + 3 4T | 7.75                        | 36                        | 35                         | 100             |
| AB-SM-16FT | 16                | 4.5              | 5.75                | 3/4 x 24 + 3 4T | 7.75                        | 40                        | 35                         | 100             |
| AB-FL-6FT  | 6                 | 4.5              | 5.25                | 3/4 x 24 + 3 4T | 7.75                        | 30                        | 25                         | 100             |
| AB-FL-8FT  | 8                 | 4.5              | 5.5                 | 3/4 x 24 + 3 4T | 7.75                        | 38                        | 25                         | 100             |
| AB-FL-10FT | 10                | 4.5              | 5.75                | 3/4 x 24 + 3 4T | 7.75                        | 48                        | 25                         | 100             |
| AB-FL-12FT | 12                | 4.5              | 6                   | 3/4 x 24 + 3 4T | 7.75                        | 57                        | 30                         | 100             |
| AB-FL-14FT | 14                | 4.5              | 6.5                 | 3/4 x 24 + 3 4T | 7.75                        | 67                        | 35                         | 100             |
| AB-FL-16FT | 16                | 4.5              | 6.75                | 3/4 x 24 + 3 4T | 7.75                        | 76                        | 35                         | 100             |

### DIRECT BURY POLES

| MODEL #    | SHAFT LENGTH (FT) | MOUNTING HEIGHT (FT) | TIP OUTER Ø (IN) | GROUND LEVEL Ø (IN) | BURIAL DEPTH (FT) | NOMINAL POLE WEIGHT (LBS) | MAX ALLOWABLE WEIGHT (LBS) | 3 EPA MAX (MPH) |
|------------|-------------------|----------------------|------------------|---------------------|-------------------|---------------------------|----------------------------|-----------------|
| DB-SM-6FT  | 9                 | 6                    | 4.5              | 5.2                 | 3                 | 20                        | 25                         | 100             |
| DB-SM-8FT  | 11                | 8                    | 4.5              | 5.2                 | 3                 | 25                        | 25                         | 100             |
| DB-SM-10FT | 13                | 10                   | 4.5              | 5.3                 | 3                 | 29                        | 25                         | 100             |
| DB-SM-12FT | 15                | 12                   | 4.5              | 5.5                 | 3                 | 32                        | 30                         | 100             |
| DB-SM-14FT | 18                | 14                   | 4.5              | 5.6                 | 4                 | 36                        | 35                         | 100             |
| DB-SM-16FT | 20                | 16                   | 4.5              | 5.75                | 4                 | 40                        | 35                         | 100             |
| DB-FL-6FT  | 9                 | 6                    | 4.5              | 5.25                | 3                 | 38                        | 25                         | 100             |
| DB-FL-8FT  | 11                | 8                    | 4.5              | 5.5                 | 3                 | 46                        | 25                         | 100             |
| DB-FL-10FT | 13                | 10                   | 4.5              | 5.75                | 3                 | 55                        | 25                         | 100             |
| DB-FL-12FT | 15                | 12                   | 4.5              | 6                   | 3                 | 62                        | 30                         | 100             |
| DB-FL-14FT | 18                | 14                   | 4.5              | 6.5                 | 4                 | 76                        | 35                         | 100             |
| DB-FL-16FT | 20                | 16                   | 4.5              | 6.75                | 4                 | 85                        | 35                         | 100             |

SM = Smooth Pole

FL = Fluted Pole



# ANCHOR BASE POLE

## DECORATIVE POLE




Compliant with NAAMM & AASHTO •

Max EPA: 3 (100mph) •

Material: Fiberglass •

Non-conductive •


Non-corrosive •

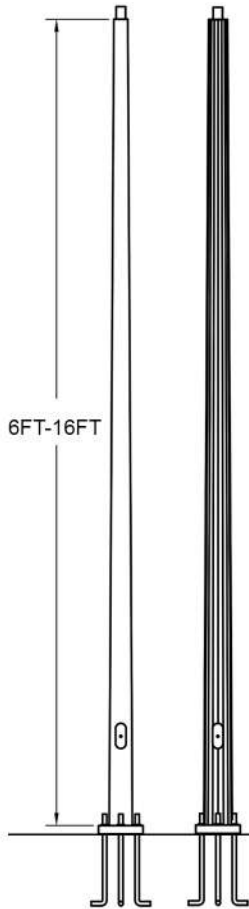


**PLEASE NOTE:**  
The Hyperia Decorative series only supports a top mounted luminaire

**PLEASE NOTE:**  
This is an order for a pole only. to purchase a shroud in conjunction please see our decorative shrouds



### HANDHOLE



### TENON



### ANCHOR BASE (not applicable for direct burry)

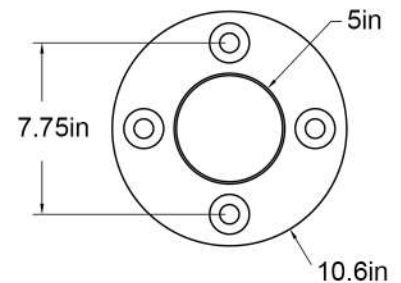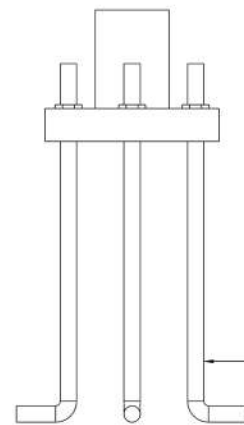

#### BOLT INFO

BOLT CIRCLE: 7.75in  
BOLT SIZE: 3/4 x 24 + 3 4 T  
BOLT PROJECTION: 3.5in

\*Bolts not to scale

| MODE #     | SHAFT LENGTH (FT) | TIP OUTER Ø (IN) | GROUND LEVEL Ø (IN) | BOLT SIZE (IN)  | ANCHOR BASE BOLT CIRC. (IN) | NOMINAL POLE WEIGHT (LBS) | MAX ALLOWABLE WEIGHT (LBS) | 3 EPA MAX (MPH) |
|------------|-------------------|------------------|---------------------|-----------------|-----------------------------|---------------------------|----------------------------|-----------------|
| AB-SM-6FT  | 6                 | 4.5              | 5.2                 | 3/4 x 24 + 3 4T | 7.75                        | 20                        | 25                         | 100             |
| AB-SM-8FT  | 8                 | 4.5              | 5.2                 | 3/4 x 24 + 3 4T | 7.75                        | 25                        | 25                         | 100             |
| AB-SM-10FT | 10                | 4.5              | 5.3                 | 3/4 x 24 + 3 4T | 7.75                        | 29                        | 25                         | 100             |
| AB-SM-12FT | 12                | 4.5              | 5.5                 | 3/4 x 24 + 3 4T | 7.75                        | 32                        | 30                         | 100             |
| AB-SM-14FT | 14                | 4.5              | 5.6                 | 3/4 x 24 + 3 4T | 7.75                        | 36                        | 35                         | 100             |
| AB-SM-16FT | 16                | 4.5              | 5.75                | 3/4 x 24 + 3 4T | 7.75                        | 40                        | 35                         | 100             |
| AB-FL-6FT  | 6                 | 4.5              | 5.25                | 3/4 x 24 + 3 4T | 7.75                        | 30                        | 25                         | 100             |
| AB-FL-8FT  | 8                 | 4.5              | 5.5                 | 3/4 x 24 + 3 4T | 7.75                        | 38                        | 25                         | 100             |
| AB-FL-10FT | 10                | 4.5              | 5.75                | 3/4 x 24 + 3 4T | 7.75                        | 48                        | 25                         | 100             |
| AB-FL-12FT | 12                | 4.5              | 6                   | 3/4 x 24 + 3 4T | 7.75                        | 57                        | 30                         | 100             |
| AB-FL-14FT | 14                | 4.5              | 6.5                 | 3/4 x 24 + 3 4T | 7.75                        | 67                        | 35                         | 100             |
| AB-FL-16FT | 16                | 4.5              | 6.75                | 3/4 x 24 + 3 4T | 7.75                        | 76                        | 35                         | 100             |

## ORDERING EXAMPLE

| MODEL #                        | FINISH                                                               | COLOR                                                                       | TENON                                                          | HANDHOLE                                                       | GFI                                                                                                                                                   | F. HOLDER                                                                       |   |    |   |     |   |     |
|--------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---|----|---|-----|---|-----|
| (Please reference chart above) | HG - high gloss<br>CI - cast iron texture<br>SSG - smooth semi gloss | BLK - black<br>BR - bronze<br>GR - gray<br>CM - color match (RAL# required) | T1 - 3in Ø x 3in long tenon<br>T2 - 2 3/8in Ø x 4in long tenon | H0 - no handhole<br>H2 - 2 1/2in x 5in<br>CH - custom handhole | GFI - standard Ground Fault Circuit Interrupter<br>GFIU - in use Ground Fault Circuit Interrupter<br><br>(leave blank if you do not want this option) | FH - side mount flag holder<br><br>(leave blank if you do not want this option) |   |    |   |     |   |     |
| AB-FL-6FT                      | +                                                                    | HG                                                                          | +                                                              | BLK                                                            | +                                                                                                                                                     | T1                                                                              | + | H2 | + | ... | + | ... |
| = AB-FL-6FT-HG-BLK-T1-H2       |                                                                      |                                                                             |                                                                |                                                                |                                                                                                                                                       |                                                                                 |   |    |   |     |   |     |

\*If CM, CH, GFI, GFIU or FH selected please call for further instructions






# DIRECT BURY POLE DECORATIVE POLE




- Max EPA: 3 (100mph) •
- Material: Fiberglass •
- Non-conductive •
- Non-corrosive •
- Compliant with NAAMM & AASHTO •

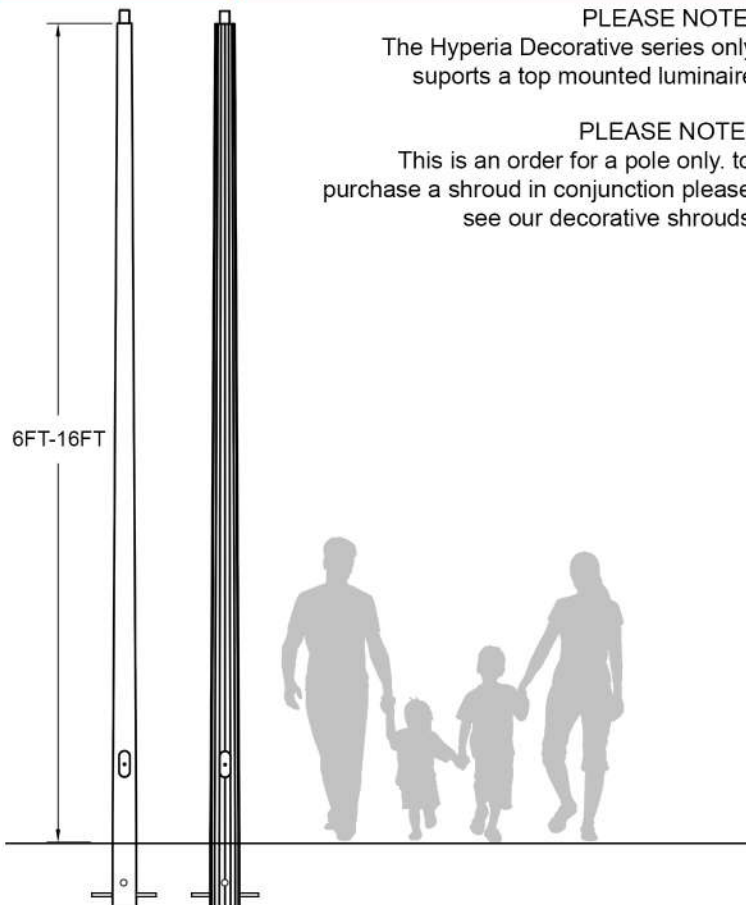

**PLEASE NOTE:**  
The Hyperia Decorative series only supports a top mounted luminaire

**PLEASE NOTE:**  
This is an order for a pole only. to purchase a shroud in conjunction please see our decorative shrouds


## HANDHOLE



## TENON



## DIRECT BURY

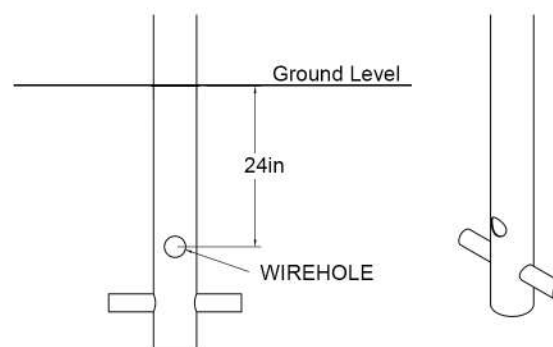

| MODE #     | SHAFT LENGTH (FT) | MOUNTING HIGHT (FT) | TIP OUTER Ø (IN) | GROUND LEVEL Ø (IN) | BURIAL DEPTH (FT) | NOMINAL POLE WEIGHT (LBS) | MAX ALLOWABLE WEIGHT (LBS) | 3 EPA MAX (MPH) |
|------------|-------------------|---------------------|------------------|---------------------|-------------------|---------------------------|----------------------------|-----------------|
| DB-SM-6FT  | 9                 | 6                   | 4.5              | 5.2                 | 3                 | 20                        | 25                         | 100             |
| DB-SM-8FT  | 11                | 8                   | 4.5              | 5.2                 | 3                 | 25                        | 25                         | 100             |
| DB-SM-10FT | 13                | 10                  | 4.5              | 5.3                 | 3                 | 29                        | 25                         | 100             |
| DB-SM-12FT | 15                | 12                  | 4.5              | 5.5                 | 3                 | 32                        | 30                         | 100             |
| DB-SM-14FT | 17                | 14                  | 4.5              | 5.6                 | 4                 | 36                        | 35                         | 100             |
| DB-SM-16FT | 19                | 16                  | 4.5              | 5.75                | 4                 | 40                        | 35                         | 100             |
| DB-FL-6FT  | 9                 | 6                   | 4.5              | 5.25                | 3                 | 38                        | 25                         | 100             |
| DB-FL-8FT  | 11                | 8                   | 4.5              | 5.5                 | 3                 | 46                        | 25                         | 100             |
| DB-FL-10FT | 13                | 10                  | 4.5              | 5.75                | 3                 | 55                        | 25                         | 100             |
| DB-FL-12FT | 15                | 12                  | 4.5              | 6                   | 3                 | 62                        | 30                         | 100             |
| DB-FL-14FT | 17                | 14                  | 4.5              | 6.5                 | 4                 | 76                        | 35                         | 100             |
| DB-FL-16FT | 19                | 16                  | 4.5              | 6.75                | 4                 | 85                        | 35                         | 100             |

## ORDERING EXAMPLE

| MODEL #                        | FINISH                                                               | COLOR                                                                       | TENON                                                          | HANDHOLE                                                       | GFI                                                                                                                                                   | F. HOLDER                                                                       |                                                                           |    |   |     |   |     |
|--------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------|----|---|-----|---|-----|
| (Please reference chart above) | HG - high gloss<br>CI - cast iron texture<br>SSG - smooth semi gloss | BLK - black<br>BR - bronze<br>GR - gray<br>CM - color match (RAL# required) | T1 - 3in Ø x 3in long tenon<br>T2 - 2 3/8in Ø x 4in long tenon | H0 - no handhole<br>H2 - 2 1/2in x 5in<br>CH - custom handhole | GFI - standard Ground Fault Circuit Interrupter<br>GFIU - in use Ground Fault Circuit Interrupter<br><br>(leave blank if you do not want this option) | FH - side mount flag holder<br><br>(leave blank if you do not want this option) | *If CM, CH, GFI, GFIU or FH selected please call for further instructions |    |   |     |   |     |
| DB-FL-6FT                      | +                                                                    | HG                                                                          | +                                                              | BLK                                                            | +                                                                                                                                                     | T1                                                                              | +                                                                         | H2 | + | ... | + | ... |
| = DB-FL-6F-HG-BLK-T1-H2        |                                                                      |                                                                             |                                                                |                                                                |                                                                                                                                                       |                                                                                 |                                                                           |    |   |     |   |     |